



Trevor Boundy <trevor@boundy39.com>

81 Second 1/2A Fubar 600 - Red Silk Fuselage Covering (Part 5)

1 message


Tandy Walker <rdb435021@icloud.com>
To: Tandy Walker <rdb435021@icloud.com>

S

Report No. 81

*Second 1/2A Fubar 600**May 1, 2020*

This afternoon I covered the top of the wing saddle. It is important to stick the silk down good in the corner seam along the side runners or it will pull up and bride over the corner. The silk in the these seams were given four coats of dope and let dry before the top of the wing saddle was doped once.

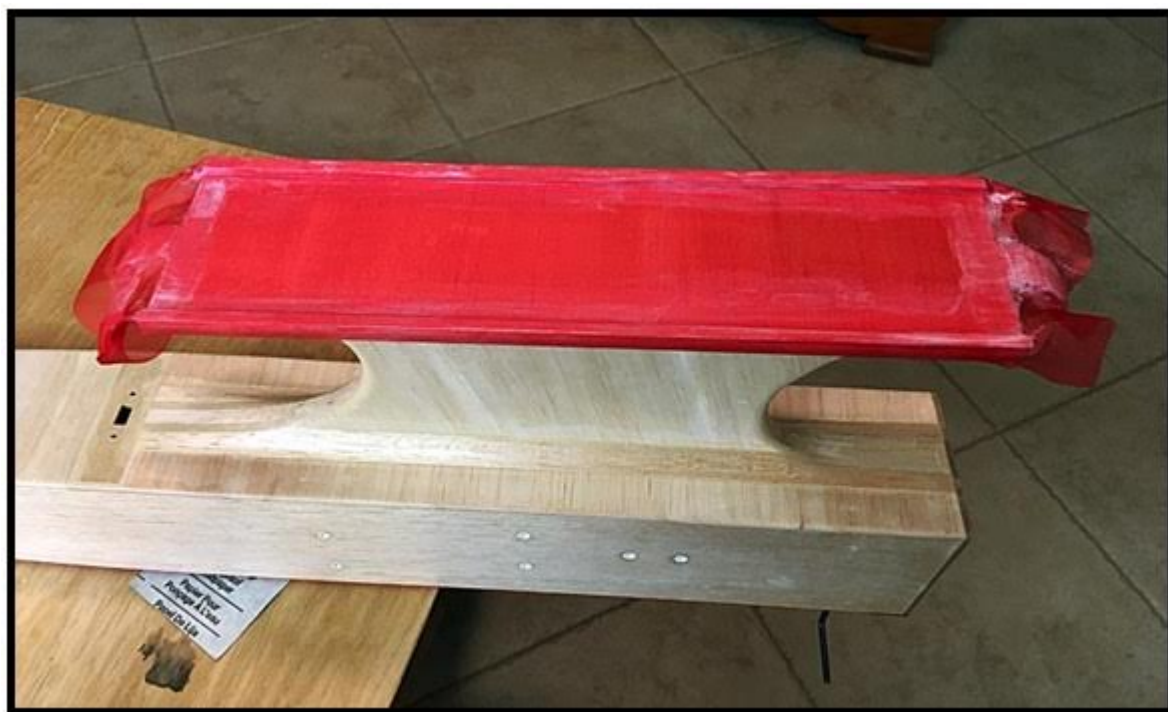

This picture shows the top of the wing saddle silked and trimmed with one coat

of clear dope. I want the clear dope to thoroughly dry overnight before two more coats are brushed on.



At this point, silk covering steps 1 thru 8 have been completed. Covering the difficult pylon sides (Steps 9 & 10) will be next as shown below. However, it is Friday and I am going to quit early today and will probably have a drink or two to relax later on after I get the model room cleaned up.....Tandy

1. Hatches ✓
2. Rudder ✓
3. Cowl ✓
4. Bottom of Stab Saddle ✓
5. Fuselage Aft Bottom ✓
6. Firewall ✓

7. Fuselage Forward Bottom ✓
8. Wing Saddle ✓
9. Left Side of Pylon ~ Cover Next
10. Right Side of Pylon ~ Cover Next
11. Right Side of Fin
12. Left Side of Fin
13. Dorsal fin
14. Top of Fuselage
15. Rudder Bottom
16. Top of Stab Saddle
17. Right Side of Fuselage
18. Left Side of Fuselage