

From: ["Tandy C. Walker" <tandyw@flash.net>](mailto:tandyw@flash.net)


To: ["Walker, Tandy C." <tandyw@flash.net>](mailto:tandyw@flash.net)

Date: 4/4/2009 9:39:33 AM


Subject: 69 Sailplane Cowl Cut Outs for Landing Gear Wire

Comet Sailplane Project

Yesterday I installed the landing gear on the fuselage in order to locate and make the cut outs in the rear bulkhead of the cowl for the main struts of landing gear. In the picture below, you see the 1/8" landing gear wire emerging out the rear cowl cut out on the right side.

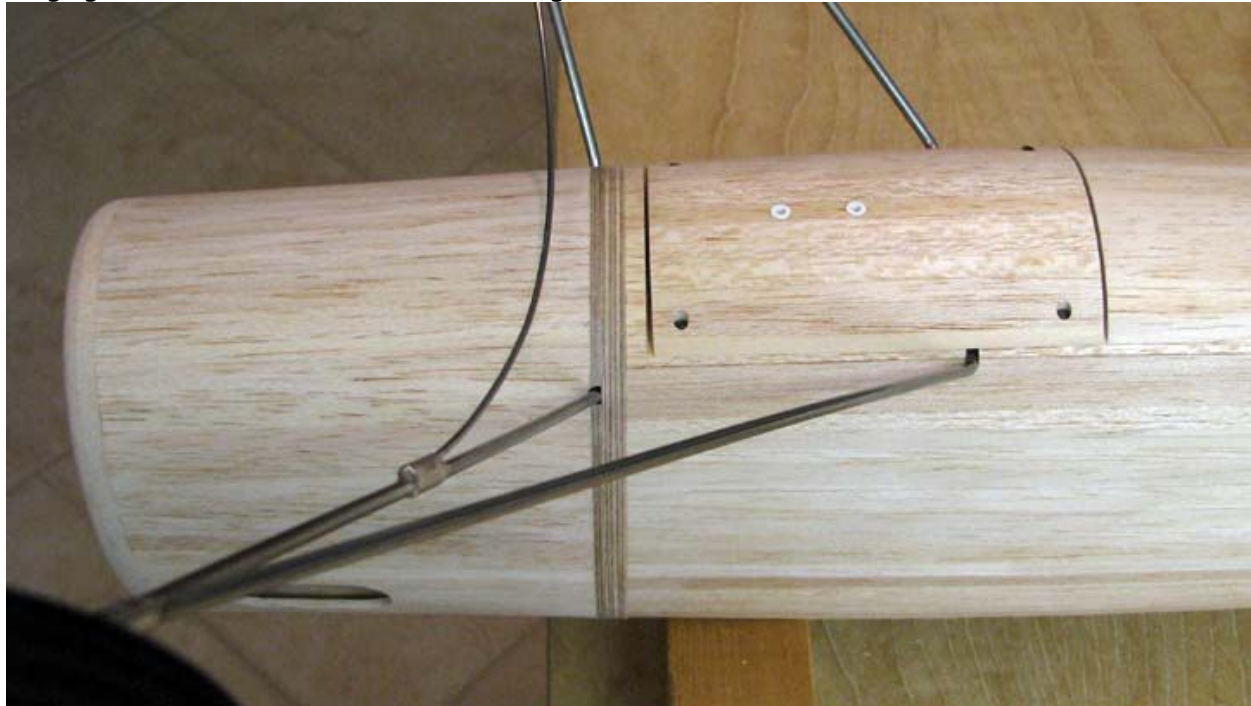

Here you can see both sides of the landing gear wires coming out from behind the cowl.

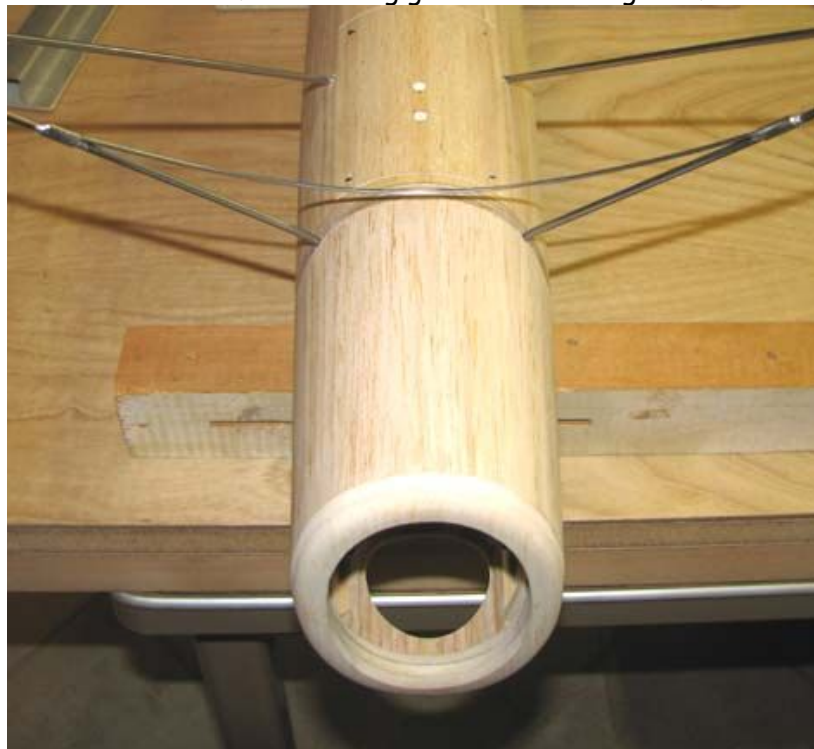

This picture shows the entire fuselage up on the landing gear, cowl installed, and a 2-1/4" aluminum spinner mounted on the front of the engine.....Tandy

